



***The Problem:
Fasteners & Welding***

- Are unable to join certain dissimilar materials
- May result in stress cracking leading to shortened vehicle life
- May cause galvanic corrosion with joined aluminum and steel components
- May cause weld distortion, preventing Class A finishes

***The Solution:
Plexus® Adhesives***

- Enable primerless adhesion to multiple materials
- Distribute stress with unparalleled durability
- Enable use of non-corrosive materials like composites, thermoplastics and aluminum
- Create clean “class A” surfaces


Contact us to conduct an assembly line audit to find out if Plexus® is right for you!
cs@itwpp.com

Structural Bonding Solutions for Construction Vehicles

Product	Chemistry	Description	Mix ratio (by volume)	Working time (mins)	Tensile strength (psi)	Tensile elongation (%)														
							Aluminum	Raw Steel	E-Coated	Galvaneal	Stainless Steel	Cast Iron	ABS	Nylon	FRP	DCPD	SMC			
MA8110	MMA	Bracket bonding, multimerial bonding	1:1	8 - 12	3,350	40 - 70	++	++	++	++	++	++	++	++	++	++	++	++	++	+
MA8120	MMA	Bracket bonding, multimerial bonding	1:1	18 - 22	2,750	50 - 80	++	++	++	++	++	++	++	++	++	++	++	++	++	+
MA420	MMA	Composite and thermoplastic bonding	10:1	4 - 6	2,850	20 - 50	+*	+*	++	-	++	-	++	-	++	++	++	++	+	
MA320	MMA	Composite and thermoplastic bonding	10:1	8 - 12	1,950	60 - 100	+*	+*	++	-	++	-	++	-	++	++	++	++	+	
MA422	MMA	Composite bonding, aluminum to painted steel	10:1	17 - 24	2,850	75 - 100	+*	+*	++	-	++	-	++	-	++	++	++	++	+	
PU2105	PU	Rigid paintable seam sealer	1:1	4 - 6	4,000	5	++	+	++	++	++	-	-	-	++	++	++	++	+	
AC1700	Polyester	Sprayable body filler, fills pinholes on castings	2%	3 - 6	n/a	n/a	++	++	-	++	+	++	-	-	++	-	-	-	-	

++ Excellent adhesion with no to little surface preparation. + Good adhesion with some surface preparation. - Not recommended. * Use PC120 Cleaner Conditioner for optimum long term environmental durability

Relative Labor Spent to Assemble

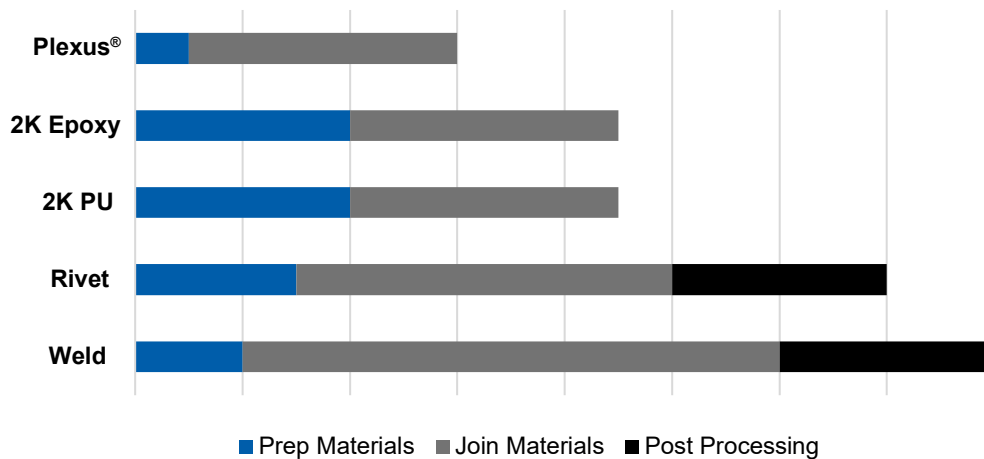

Plexus Adhesives

- Ensure great stress distribution and fatigue resistance for optimal durability
- Have excellent weather resistance
- Offer high elongation enabling dissimilar material joining

