


Pump Repair and Rebuild Solutions

Reduce Maintenance Cost. Increase Equipment Life.

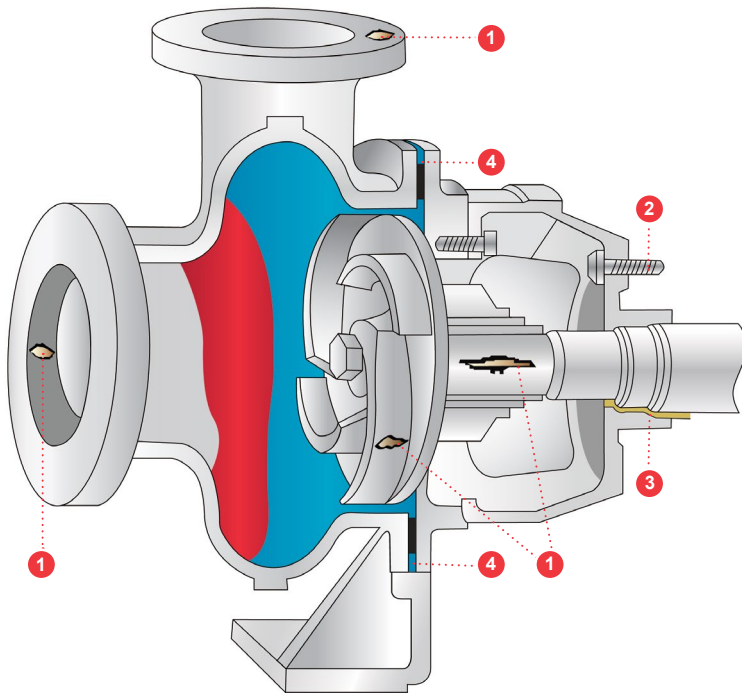

1 Devcon® Metal Repair Compounds

- Protect against wear, abrasion and corrosion
- Repair corroded, pitted or worn metal
- Rebuild metal surfaces to original dimensions
- Can be machined, drilled or tapped

2 Permatex® Threadlocking Compounds

- Eliminate loosening caused by shock or vibration
- Protect against rust and corrosion

3 Permatex® Retaining Compounds

- Secure and protect non-threaded assemblies
- Fill voids to create solid, one-piece assembly


4 Permatex® Gasketing Compounds

Anaerobic Gasket Makers

- For rigid assemblies designed to eliminate movement
- High chemical resistance
- Maximum temperature of 400°F

The Right Stuff®

- Provides instant seal on flexible joints
- Use with dissimilar substrates
- Temperatures up to 450°F

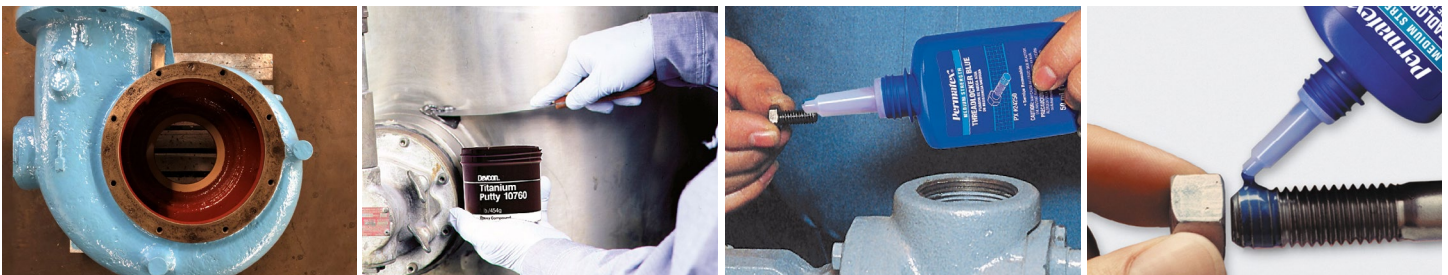

Devcon® Metal Repair Compounds

| Item | Product | Size | Description |
|-------|---|-------------------|--|
| 10110 | Devcon® Plastic Steel® Putty (A) | 1 lb | Steel-filled epoxy putty for metal repairs |
| 10240 | Devcon® Plastic Steel® 5 Minute® Putty (SF) | 1 lb | Fast-curing, steel-filled epoxy for emergency repairs |
| 11760 | Devcon® Brushable Ceramic Red | 2 lb | Protects against wear, abrasion, corrosion and chemicals |
| 11765 | Devcon® Brushable Ceramic Blue | 2 lb | Protects against wear, abrasion, corrosion and chemicals |
| 10760 | Devcon® Titanium Putty | 1 lb | Titanium reinforced shaft repair putty – can be machined |
| 11781 | Devcon® EZ-Spray Ceramic Blue | 1000 ml cartridge | Sprayable, solvent-free, high performance ceramic-filled epoxy |
| 11700 | Devcon® Ceramic Repair Putty | 3 lb | Smooth, trowelable, ceramic-filled epoxy compound |

Permatex® Retaining Compounds

| Item | Product | Size | Description |
|-------|--|--------------|---|
| 60950 | Permatex® Bearing Mount for Close Fits | 50 ml bottle | Low viscosity, rapid-curing anaerobic adhesive for press fit assemblies |
| 68050 | Permatex® Bearing Mount for Relaxed Fits | 50 ml bottle | High strength, medium viscosity anaerobic adhesive for slip fit assemblies. |

Permatex® Threadlockers

| Item | Product | Size | Description |
|-------|---|-------------------------------|---|
| 24010 | Permatex® Medium Strength Threadlocker Blue Gel | 10 gm Gel Twist™ tube, carded | Reliably seal all nut and bolt applications 1/4" to 1" |
| 24250 | Permatex® Medium Strength Threadlocker Blue | 50 ml bottle | All purpose, removable strength threadlocker |
| 27010 | Permatex® High Strength Threadlocker Red Gel | 10 gm Gel Twist™ tube, carded | Permanently locks bolts up to 1" |
| 27150 | Permatex® High Strength Threadlocker Red | 50 ml bottle | Permanently locks studs from 3/8" up to 1" |
| 25210 | Permatex® High Strength Removable Threadlocker Orange | 10 ml bottle | High strength, yet removable with hand tools |
| 57535 | Permatex® Seal+Lock Thread Compound | 35 ml tube, carded | Combines the power of a thread sealant and a thread locker into one |

Permatex® Gasketing Compounds

| Item | Product | Size | Description |
|-------|---|----------------------|---|
| 51813 | Permatex® Anaerobic Gasket Maker | 50 ml tube, carded | Use as a form-in-place gasket on rigid metal surfaces |
| 33694 | Permatex® The Right Stuff® | 10 oz cartridge | Makes high performance, leak-proof gaskets – instant seal |
| 25228 | Permatex® The Right Stuff® 90 Minute Gasket Maker | 10.1 fl oz cartridge | Return to service quickly, just 90 minutes curing time! |

The technical information, recommendations and other statements contained in this sheet are based upon good faith tests or experience that ITW Performance Polymers believes are reliable, but the accuracy or completeness of such information is not guaranteed. The information is not intended to substitute for the customers' own testing.

©ITW Performance Polymers, January 2024.