


Potting and Encapsulation Solutions for High Voltage & Electronic Applications



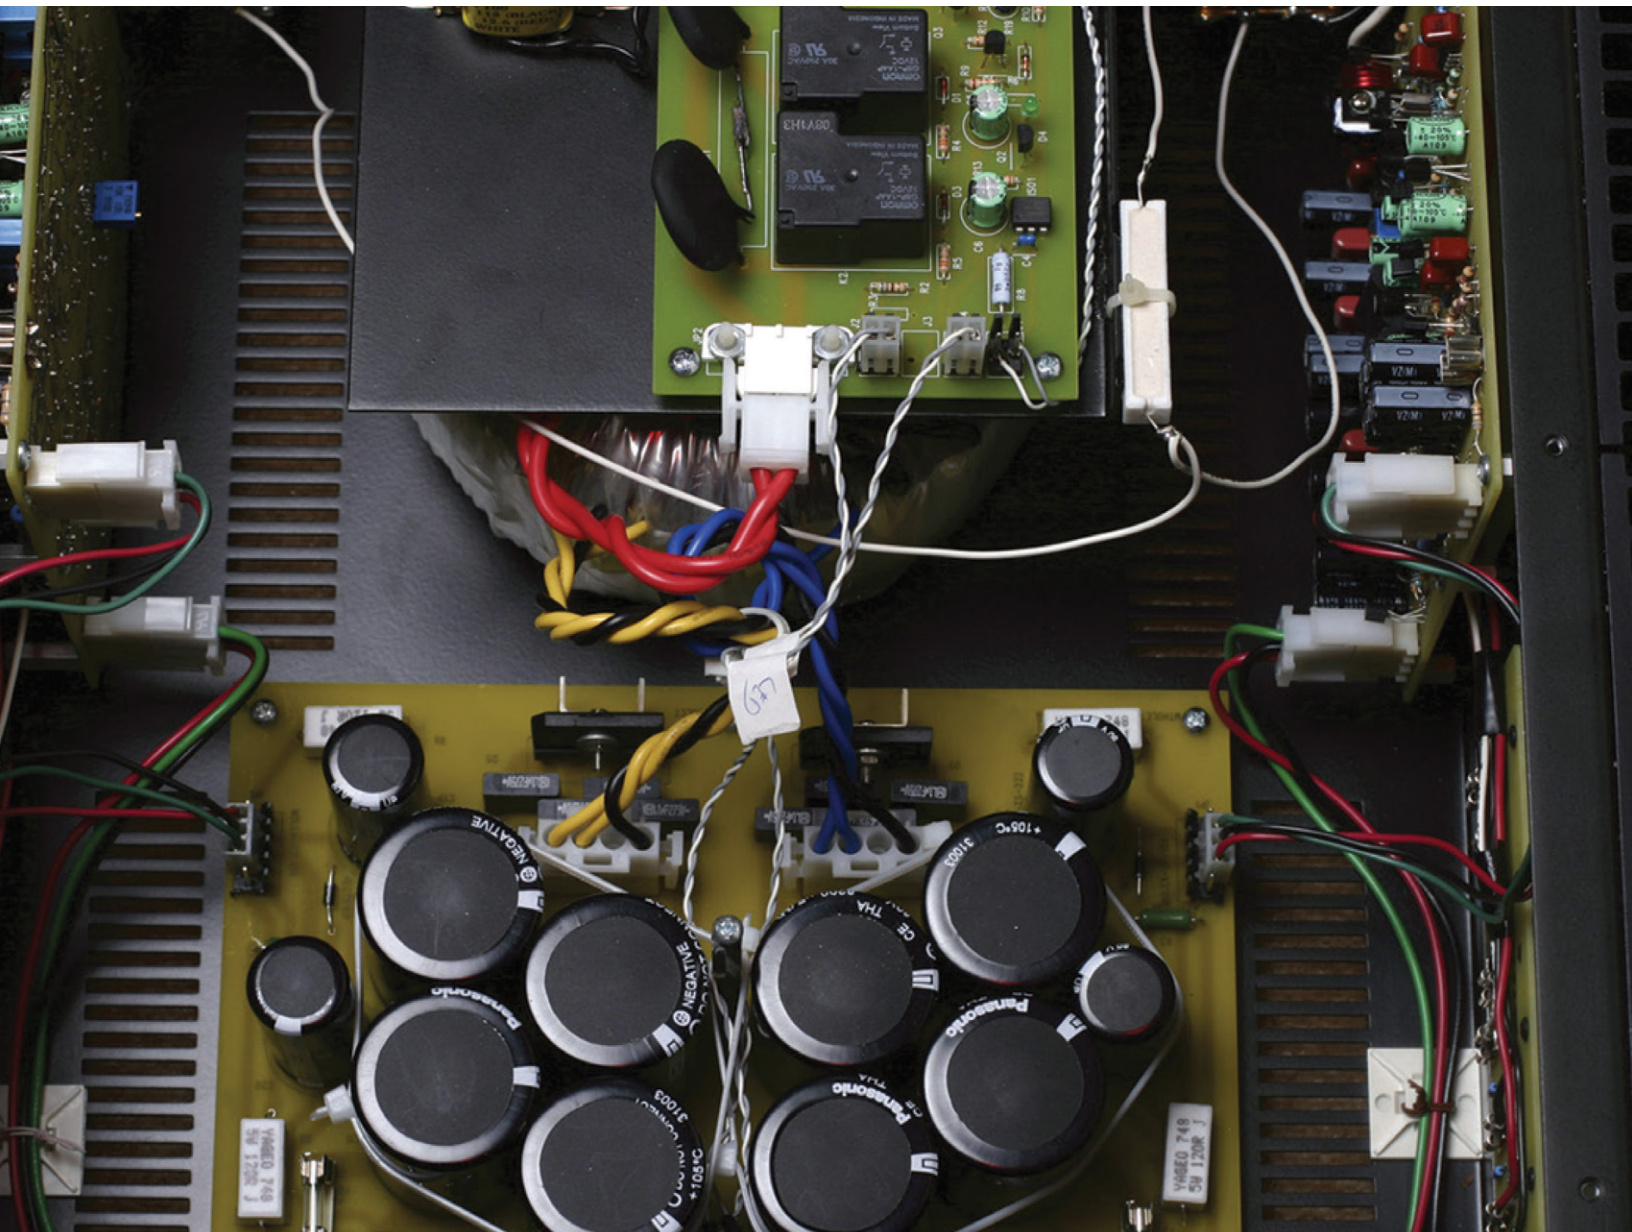

INTRODUCTION

As assemblies continue to become smaller and more compact, the need to address the heat generated by these devices continues to grow. Dissipating this heat and removing it from the unit is a key factor in the performance and longevity of the device.

That's where the Insulcast range of potting and encapsulation compounds play a critical role. The Insulcast products are specifically designed to protect components in applications such as heat sink bonding, surface mount and die attach while meeting the challenges of heat dissipation. In addition to providing superior adhesion to a variety of substrates, these compounds also help withstand chemicals and corrosion.

As a result, the Insulcast compounds are widely used in a number of markets including aerospace, automotive both conventional and electric vehicles, electronics, power generation, telecommunications and utilities. These products find extensive application in ignition coils, printed circuit boards, EV batteries, high voltage power supplies, transformers and other critical electronic equipment.

INSULCAST SOLUTIONS

Highly engineered epoxy and silicone potting compounds

BENEFITS


Insulcast Epoxies are general purpose and thermally conductive compounds. They are formulated to provide superior mechanical strength, excellent moisture resistance and high chemical resistance. They exhibit good adhesion properties.

Insulcast Silicones are both general purpose and thermally conductive compounds. They exhibit high flexibility, are easily repairable and have superior performance over a broad temperature range. They have minimal shrinkage during cure.

Addition Cure silicones are kit matched products that are often cured at elevated temperature to speed the cure. They are lower in viscosity and available in water clear versions.

ESTABLISHED IN 1972

- Part of ITW Performance Polymers
- Long History of Innovation
- Dedicated Sales & Technical Support
- Custom Formulated Solutions
- Global Distribution Network

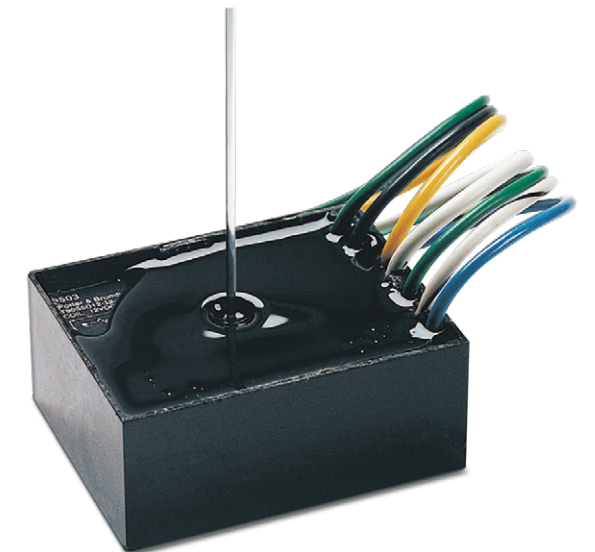

Insulcast Epoxies

Product	Description	Color	Pot Life @ 25°C	Mix Ratio by Weight (with Curing Agent)	Viscosity (Mixed, cP)	Cure Cycle	Shore Hardness	Thermal Conductivity, (W/mK)	Glass Transition Point, (°C)	Dielectric Constant, (KHz)	Dielectric Strength, (Volts/Mil)	Volume Resistivity, (Ohm-cm)	Coefficient of Thermal Expansion (°C)	Service Temperature, (°C)	UL Flammability Rating
Insulcast 101	Has excellent chemical resistance to a broad range of acids, bases and organic solvents.	Black	45 min	1:1	10,000	48hr @ 25°C	80D	0.468	80	4.40	410	1x10 ¹⁴	30x10 ⁻⁶	-55 to +105	
Insulcast 116 FR	Easy-to-use, general purpose potting and casting compound. The convenient 1:1 mix ratio makes it ideal for production line mixing as well as for automatic dispensing.	Black	90 min	1:1	8,100	24hr @ 25°C	75D	0.649	80	4.40	420	1x10 ¹⁴	30x10 ⁻⁶	-40 to +105	94V-0
Insulcast 116 FR FC	Easy-to-use, general purpose, fast set potting and casting compound.	Black	30 - 45 min	1:1	9,800	16hr @ 25°C	75D	0.649	80	4.40	420	1x10 ¹⁴	30x10 ⁻⁶	-40 to +105	94V-0
Insulcast LN 1-05	Non-cracking compound that is suitable for large potting applications.	Black	8 -10 hours	7.2:1	5,000	36hr @ 25°C	85D	0.648	75	5.15	400	6x10 ¹⁵	32x10 ⁻⁶	-40 to +105	94V-0
Insulgel 70 CC FR NS	Unique, flexible epoxy compound that exhibits superior thermal shock resistance. It provides reduced shrinkage and low CTE resulting in decreased stress and improved adhesion.	Black	30 - 45 min	100:10-11	3,000	24hr @ 25°C	50D	0.518	4 - 9	4.1	400	7x10 ¹²	90x10 ⁻⁶	-40 to +105	94V-0

Insulcure Properties	Insulcure 9	Insulcure 11B	Insulcure 20	Insulcure 24	Insulcure 26
Pot Life (Minutes)	45	300	60	80	120

* Value is determined by choice of Insulcure. See values for all Insulcures in the Insulcure property table below.

** Cure Cycle dependent on choice of Insulcure.

Insulcast Silicones

Product	Description	Color	Pot Life @ 25°C	Mix Ratio by Weight	Viscosity (mixed, cP)	Cure Cycle	Shore Hardness	Thermal Conductivity (W/mK)	Dielectric Constant (KHz)	Dielectric Strength (Volts/Mil)	Volume Resistivity (Ohm-cm)	Coefficient of Thermal Expansion (°C)	Service Temperature, (°C)	UL Flammability Rating
RTVS 27	Low viscosity, general purpose compound. RTVS 27 exhibits low temperature flexibility, excellent electrical properties, high temperature resistance and easy removal for component replacement or repair.	Black	60 - 90 min	1:1	2,900	24hr @ 25°C	60A	0.31	3.00	500	1x10 ¹⁵	22x10 ⁻⁵	-55 to +204	94V-0
RTVS 27 FC	Low viscosity, fast cure compound that has excellent electrical properties.	Black	<5 min	1:1	2,900	1 hr @ 25°C	60A	0.31	3.00	550	1x10 ¹⁵	22x10 ⁻⁵	-55 to +204	94V-0
RTVS 27 HTC	Low viscosity compound with high thermal conductivity. This combination makes it ideal for potting dense component packages requiring heat dissipation.	Black	60 min	1:1	6,000	24hr @ 25°C	60A	1.0	4.00	500	1x10 ¹⁵	17x10 ⁻⁵	-55 to +232	94V-0
RTVS 27 LV	Very low viscosity silicone potting compound providing reliability gap filling tight spaces.	Dark Gray	120 min	1:1	1,200	24hr @ 25°C	60A	0.31	3.40	500	3x10 ¹⁴	22x10 ⁻⁵	-55 to +204	94V-0
RTVS 42 Curtis II	This unique silicone-epoxy copolymer withstands severe thermal shock and eliminates cracking during thermal stress, provides low moisture absorption and has excellent dielectric insulation. It contains silane adhesion promoters that enable it to bond well to most metals and plastics.	Black	<20	100:4.8	16,000	24hr @ 25°C	75A	0.58	4.00	500	1x10 ¹⁵	45x10 ⁻⁶	-55 to +125	94V-0
RTVS 3-95-1	High thermal conductivity, high temperature compound.	Red	90 min	100:5	10,000	24hr @ 25°C	65A	1.25	5.00	500	5x10 ¹⁴	18x10 ⁻⁵	-55 to +260	94V-0
RTVS 3-95-2	High temperature with very high thermal conductivity potting compound. Suitable for Electric Vehicle applications.	Red	90 min	1:1	35,000	24hr @ 25°C	85A	1.44	5.00	425	1x10 ¹⁴	15x10 ⁻⁵	-55 to +260	94V-0

RTVS PRIMERS are used to strengthen adhesion of our two component addition cure RTV silicones, one component condensation cure RTV silicones, and mold-making compounds. These primers may be used on metal, wood, glass, ceramics and many plastics. There are 2 primers available: RTVS 44 (Clear), RTVS 41 (Blue). These primers have a mixed viscosity of 1 cP and a flash point of 84°F.

Global Operations

North America

ITW Performance Polymers

30 Endicott Street
Danvers, MA 01923 USA
Tel: +1 855-489-7262
cs@itwpp.com
itwpp.com

ITW Performance Polymers

130 Commerce Drive
Montgomeryville, PA 18936
Tel: +1 215-855-8450
cs@itwpp.com
itwpp.com

South America

ITW PP&F

Rua Antonio Felamingo, 430
Valinhos / SP – CEP: 18279-452
Tel: +55 19 2138.7600
itwppf.com.br

Europe

ITW Performance Polymers

Bay 150,
Shannon Industrial Estate
Shannon, County Clare
Ireland
Tel: +353 61 771500
cs@itwpp.com
itwpp.com

Asia Pacific

ITW PP&F China

2703, XingYuan Building
No. 418, Guiping Rd.
Cao He Jing Hi-Tech Park
Shanghai
China 200233
Tel: +86-21-5426-1212
itwppfchina.com

ITW PP&F Japan

30-32 Enoki-cho,
Suita, Osaka, Japan 564-0053
Tel: +81-6-6330-7118
itwppfjapan.com

ITW PP&F Korea

13th floor, PAX Tower, Unit B
231-13, Nonhyeon-Dong,
Gangnam-Gu
Seoul, Korea 135-010
Tel: +82-2-2088-3560
itwppfkorea.com

ITW PP&F Polymers Australia

100 Hassall Street, Wetherill Park
NSW 2164
Tel: +800 063 511
itwppf.com.au

ITW India Limited

Plot no: 34 to 37, Phase-2,
IDA, APIIC, Pashamylaram,
Medak Dist-502307
Andhra Pradesh, India
Tel: +08455-224700,224701
chemininfo@itwchemin.com
itwchemin.com

Insulcast is a registered trademark of Illinois Tool Works, Inc.
© 2026, Insulcast.
© 2026, ITW Performance Polymers. All rights reserved.

The technical information, recommendations, and other statements contained in this brochure are based upon tests or experience that ITW Performance Polymers believes are reliable, but the accuracy or completeness of such information is not guaranteed. The information provided is not intended to substitute for the customers own testing.



INSULCAST[®]

+1 215-855-8450 • itwpp.com