


SprayCore® Alphacoat 1700 Sprayable Body Filler

Save Time by Spraying Filler on Parts!

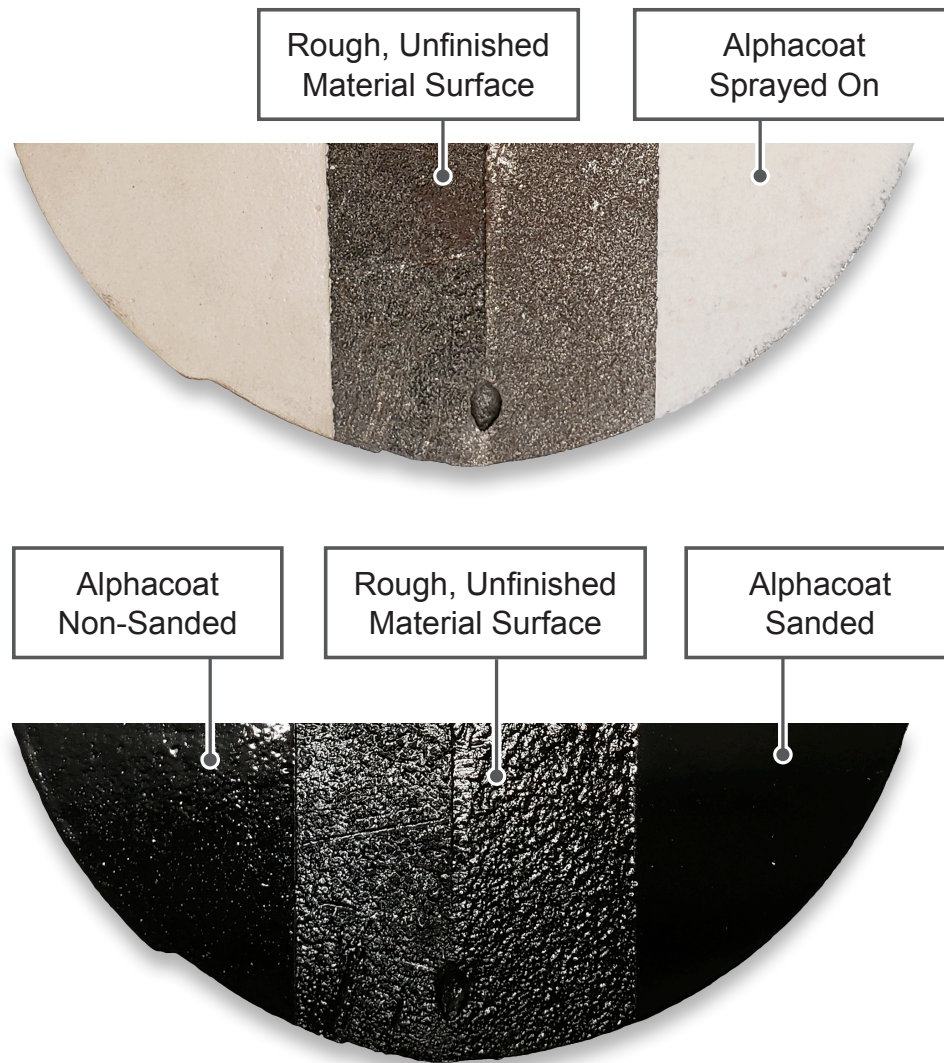

Alphacoat 1700 is a sprayable polyester based filler. It creates a sandable finish on iron, aluminum, fiberglass and wood.

Speeds up production

- Up to 60% reduction in application time

Reduces material waste

- Cures when sprayed
- No mixed material waste scrap

Won't clog sand paper

- Extremely easy to sand

Helps level uneven surfaces and reduce pinholes

- Self leveling and high build capabilities

Versatile

- Can be applied to a variety of substrates

SprayCore®

Alphacoat 1700 Sprayable Body Filler


Alphacoat 1700

Appearance	Off White
Packaging	Drum
Application Method	Sprayable
Coverage	1,400 sq ft/gal/mil
Styrene Content	20%
Mix Ratio	2% MEKP
Preferred Catalyst	MEKP-9H
Pot Life	3 - 6 Mins
Time to Sand	5 mins when heated 15 mins room temp
Density	9.1 - 9.6 lbs/gal
Viscosity (LVT #3 @ 30 RPM)	1,200 - 1,400 cPs

Packaging & Stock No.

Item no.		Description
100065	–	Drum of Alphacoat 1700
103990	–	MEKP Catalyst (Red)

Up to 3 Times Faster with Alphacoat

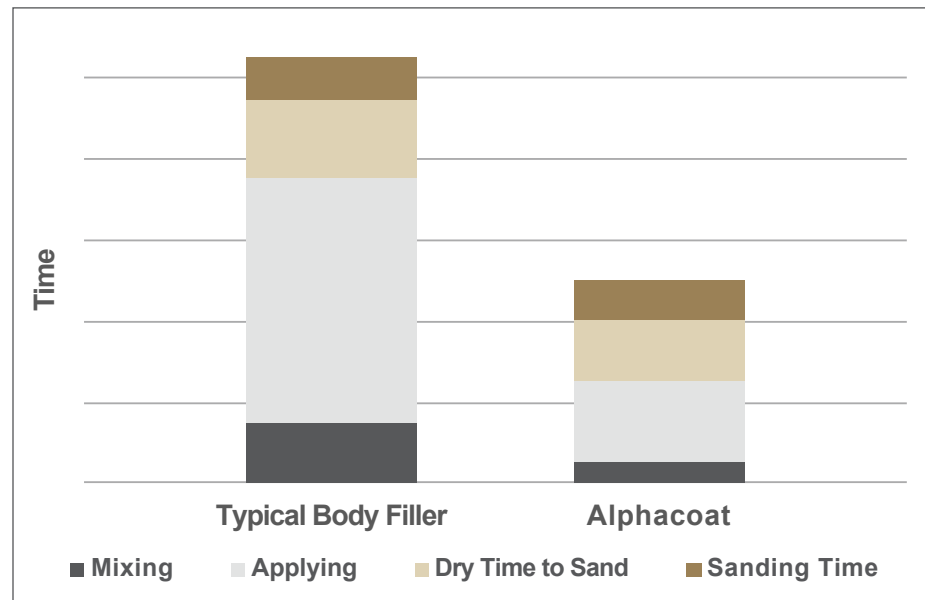

Alphacoat is a registered trademark of Illinois Tool Works, Inc. © 2021 Alphacoat – © 2021 ITW Performance Polymers, February 2021.
The technical information, recommendations and other statements contained in this sheet are based upon tests or experience that ITW Performance Polymers believes are reliable, but the accuracy or completeness of such information is not guaranteed. The information provided is not intended to substitute for the customers own testing.